

Power Splitter 698-2700MHz N-Female

Features:


- Multiple-Band Frequency Ranges
- High Power Rating 300 Watt
- Low PIM, Low VSWR
- High quality cavity type, High reliability

Specification:


| Product Type | 2-way Splitter | 3-way Splitter | 4-way Splitter |
|-----------------------|-------------------------------------|-----------------|-------------------|
| Model Number | SP2-0727-N300 | SP3-0727-N300 | SP4-0727-N300 |
| Frequency Range | 698 – 2700MHz | | |
| Insertion Loss | ≤0.3dB | ≤0.3dB | ≤0.3dB |
| Distribution Loss | 3.0dB | 4.8dB | 6.0dB |
| VSWR | ≤1.25 | | |
| PIM (IM3) | ≤-155dBc @+43dBm*2 | | |
| Power Handling | 300W | | |
| Impedance | 50Ω | | |
| Connector Type | N-Female | | |
| Applied Environment | Indoor / Outdoor | | |
| Relative Humidity | 5 to 95% | | |
| Operating Temperature | -25 to +70°C | | |
| Protection class | IP65 | | |
| Material | Cavity: Aluminum; Connector: Copper | | |
| Processing | Silver plated inner conductor | | |
| Dimension | 201.1x60.6x25mm | 218.9x60.6x25mm | 247.6x60.6x42.8mm |

Dimension & Product Image:

2 way Splitter:

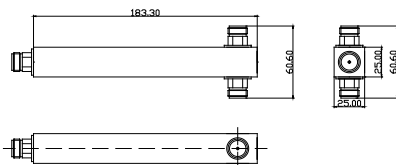

3 way Splitter:

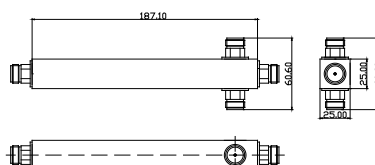

4 way Splitter:

